

PRODUCT DATASHEET**HS763 Sensor****OVERVIEW**

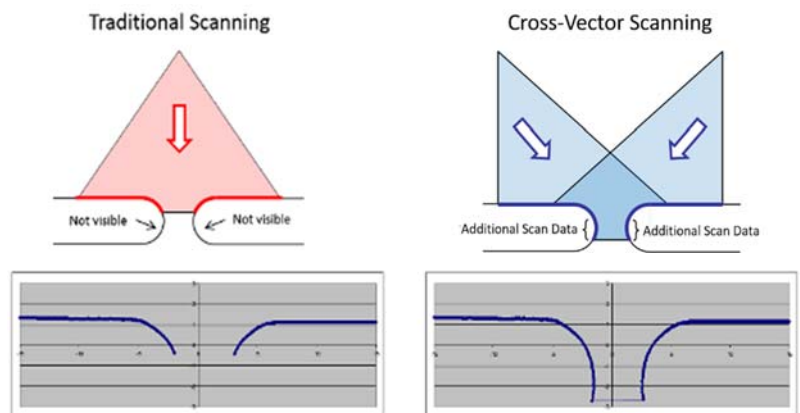
Improving on the Cross-Vector scanning capability of the HS761, the HS763 is equipped with 2 blue lasers that allow it to scan transparent and translucent surfaces as well as opaque surfaces. This allows the HS763 to be used on automotive body panels, headlamps, tail lamps, window glass and chrome.

The HS763 sensor is a complete measurement system. No external components are needed. Utilizing a powerful 1GHz processor and the unique configuration of the imaging components, the HS763 scans much faster than existing Cross-Vector sensors, capable of scanning a typical body-to-body gap in < 1 second. The 3.5" color display provides detailed graphics of plotted surface profiles, and the touch screen allows for easy menu navigation and expanded graphic functions.

**OPERATING FEATURES****CROSS-VECTOR SCANNING WITH BLUE LASERS**

Traditional laser profilers utilize a single red laser stripe coupled with a single imager to capture surface scans. But a single view cannot see surface points around the radius on the edge of the gap. The Cross-Vector sensor utilizes multiple lasers and multiple views at crossing angles. This allows the sensor to see around edges of the radius to the vertical tangent and beyond. The result is a complete surface profile and the most accurate gap measurements. Plus, no movement of the sensor is necessary for complete scanning of the gap.

The use of two blue lasers extends the capability to Cross-Vector scanning to include headlamps, tail lamps, glass and chrome.

**ROUTINE & GAUGE MODES**

Inspection routines developed using the LGWorks software can be run directly on the sensor. Detailed graphics and on-screen messages guide the inspector from one measurement to the next. Complex calculations referencing measurement data can be processed in the routine and included in the data file.

PRODUCT DATASHEET

HS763 Sensor

USED AS STANDALONE SENSOR OR CONTROLLER

The HS763 can operate as 2 distinct pieces of hardware. First it can operate as a standalone, battery powered DSP Cross-Vector Sensor. Or if the user chooses, a LaserGauge® USB sensor (such as the TS800) can be plugged into the HS763 USB port and the sensor then becomes a controller. This is especially useful when measuring hard to reach areas or places where the DSP sensor by itself doesn't fit (such as vehicle interiors, features near obstructions, etc.). The 3.5" color display of the sensor will broadcast the profile and data table as the USB sensor is triggered. Data and scans are saved to the sensor as if using a standard controller.



HARDWARE FEATURES

Power – A rechargeable, lithium-ion battery provides 3+ hours of constant operation

Communications – Zigbee wireless, USB cable or USB stick “thumb” drive

Barcode Scanner – The sensor includes a barcode reader

Color Display – The 3.5" LCD provides graphical and textual information

User Interface – Touchscreen and 5-way joystick and keypad

ADVANTAGES

- No movement of sensor required for complete scan
- No cables to external PC or other hardware required for use
- Very fast
- Scanning of headlamps, tail lamps, windows and chrome
- Proven LaserGauge® technology

SENSOR SPECIFICATIONS

Type	DSP – Handheld
Size	3.6" (w) x 5.9"h) x 10.1" (l)
Weight	34 oz. (38 oz. with battery)
User Interface	3.5" Color Display, 2 sets of 3 LED's, 5-Way Joystick and 2 Buttons
Communications	Wireless - 2.4GHz ZigBee module with ZigBee USB Stick for computer Cable - USB 2.0A to Mini 5-Pin USB, 6' Port - USB 2.0A
Processor	1GHz Speed
Memory	8GB of data/scans/routines
Battery	High capacity, rechargeable lithium-ion Inspired Energy series NB2037
FOV Options / Horizontal Scanning Resolution / Depth of Focus/Depth Accuracy	F24 =1.5" (38mm) / 0.0012" (30µm) / ± 0.3" (7.5mm)/ ± 0.0010" (25µm)
Shock Protection	Cast urethane housing
Environment	0° – 70° C

101 North Alloy Drive, Fenton, MI 48430 USA

Sales@lmicorporation.com

810.714.5811

www.lmicorporation.com

Our commitment to quality may mean a change in specifications without notice.

